



PRODUCT DATA SHEET

SUPER COOLANT

Rislone® Hy-per Cool™ Super Coolant contains very high cloud point surfactants designed to provide maximum wetting (coolant surface tension reduction) at normal and high cooling system operating temperatures. This supercharged coolant mixture eliminates bubbles, resulting in improved heat transfer to dissipate heat more efficiently in the entire cooling system. Real world and laboratory testing shows reduced engine temperatures by up to 17°C helping to prevent overheating. Super Coolant lubricates and protects the water pump, and helps prevent corrosion, erosion and electrolysis of all parts of the cooling system, including aluminum, plastics, rubber and more. Works with all colors and types of antifreeze coolant including extended life, or straight water.

Provides extra protection against higher engine temperatures. Up to 41°C lower cylinder head temperatures (CHT) enhance engine efficiency, proving better fuel economy, power and performance.

Use in gasoline classic cars, hot rods, trucks, RV's, motorcycles, automotive, heavy duty, diesel, powersports ATV, off road, racing, towing and most anything else with a cooling system.

Racing approved and safe to use from drag strips to the oval track. Contains no glycol. Provides no antifreeze protection. Always check for freeze protection if needed.

- The Best Coolant Additive Money Can Buy
- Reduces Engine Temperature
- Prevents Overheating
- Provides Maximum Corrosion Protection
- Supercharges Cooling System Performance



PRODUCT DATA SHEET


SUPER COOLANT

Caution:


Never remove radiator cap if engine is hot.

Directions:

Add one bottle to treat 11.5 to 19 liter systems. For larger and smaller systems add 30 mL per liter of capacity. Can be added to overflow tank, but it will take 4 to 5 heating and cooling cycles for product to fully enter the system. For continued protection re-treat once per year, and every time changing coolant.



Dyno-test Results Prove Hy-per Cool Super Coolant Reduces Coolant Temperatures Better Than Alternatives

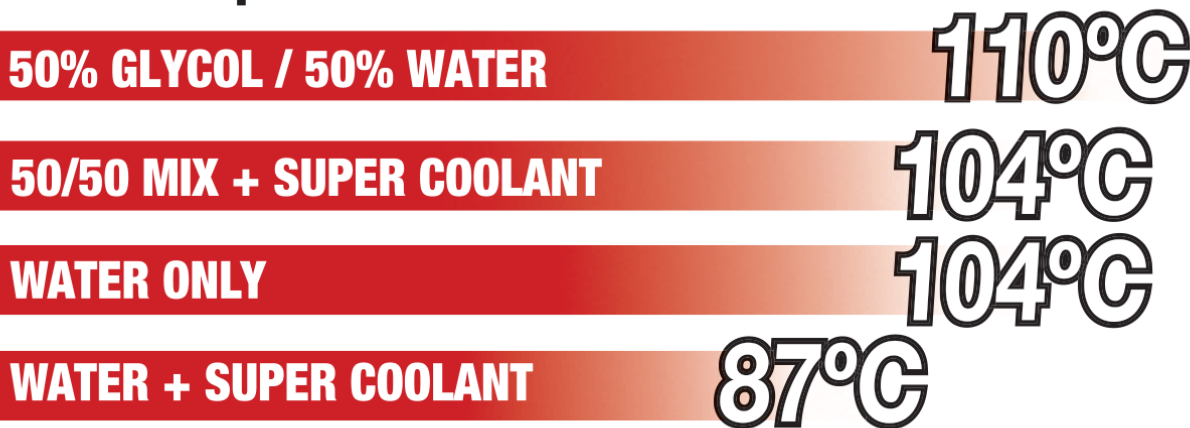

RISLONE

10386 North Holly Road
Holly, MI 48442 USA
www.rislone.com



SUPER COOLANT

Part #: 21300

473mL (16 FL OZ)

Proven Technology. Hy-per Performance.